


Origin[®] One Validated Materials Overview

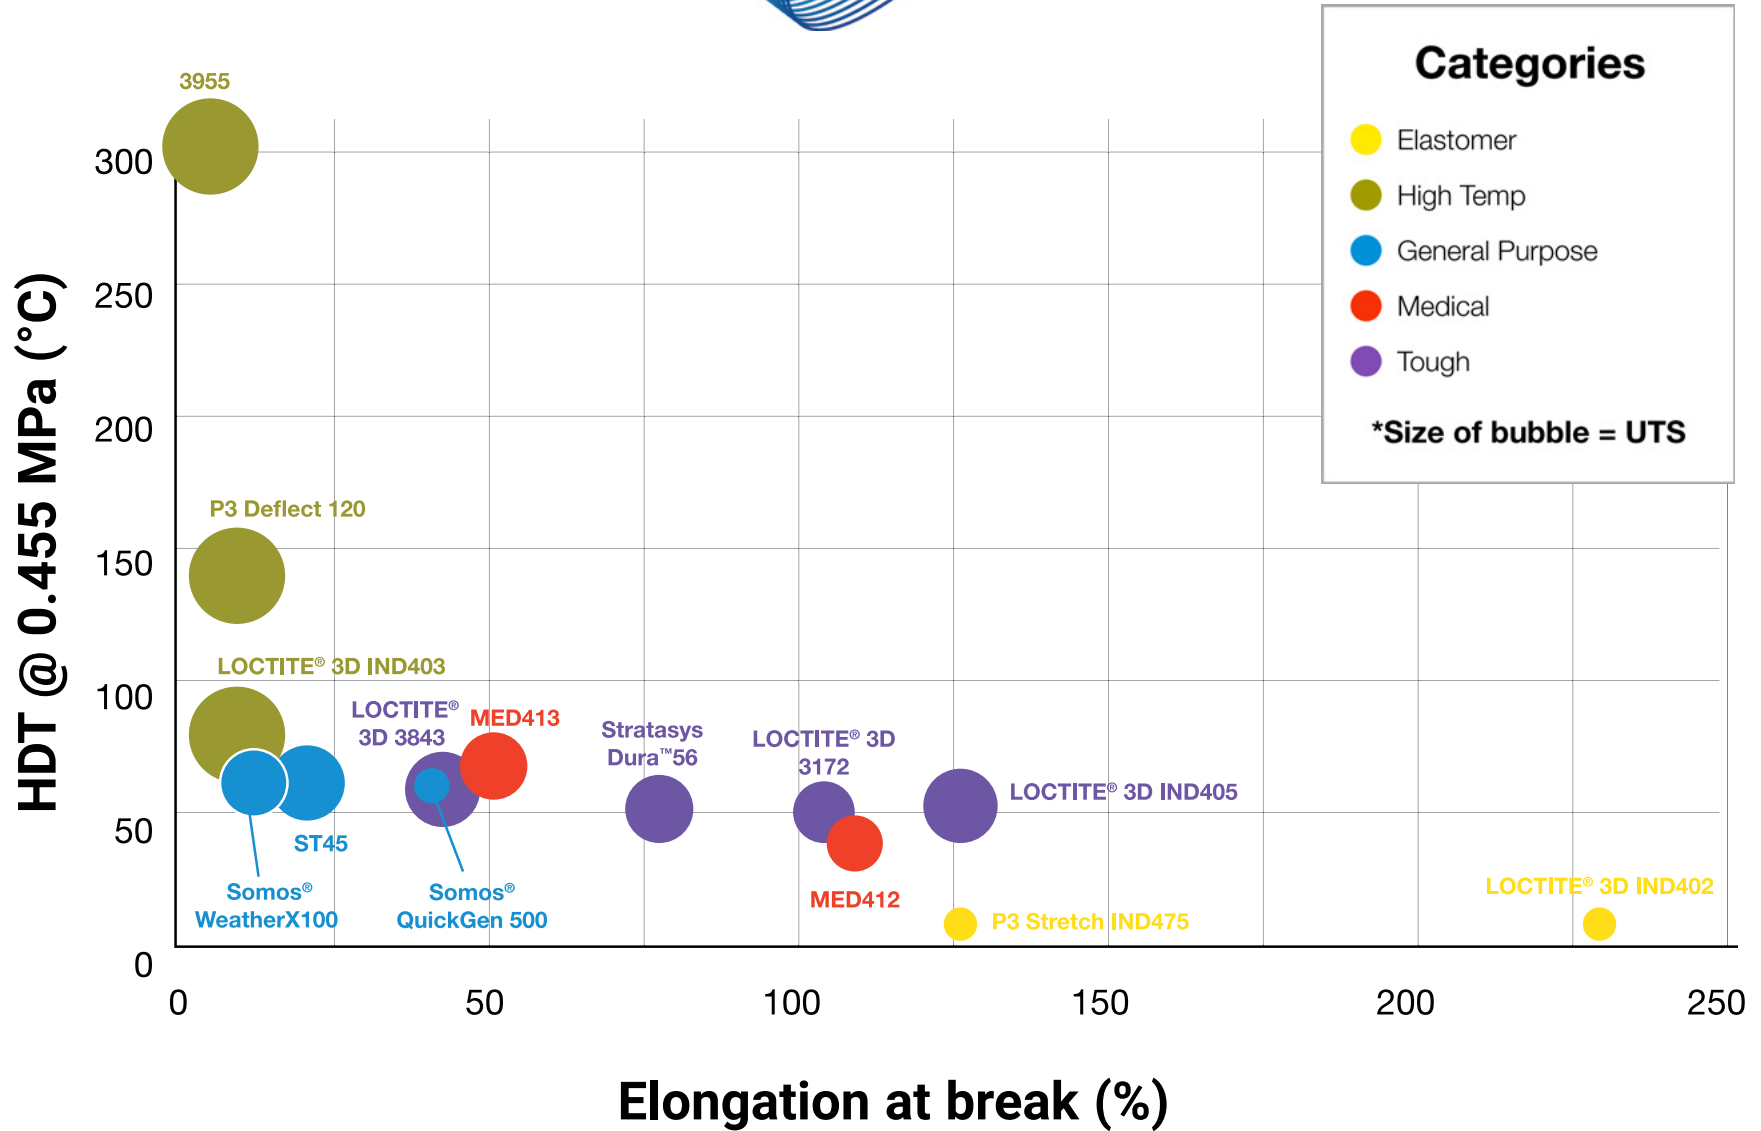

Origin® One Validated Materials Overview

Material name	Description	Categories	Ultimate tensile strength	Elongation at break	Tensile modulus	HDT	Notched izod impact	Hardness	Colors	Consider replacing	Partner page
3955	Very high temperature, high stiffness FST	●	67 MPa	2.10%	3556 MPa	> 300 °C	23 J/m	84 D	Black	Ultem, phenolic, PBT, aluminum	LOCTITE AM
P3 Deflect 120	High temperature resistance and rigid material with good elongation at break	●	100 MPa	4%	3000 MPa	121 °C	15 J/m	88 D	Black	Nylon 6, PBT	EVONIK
403	High strength, stiffness, and good HDT	●	72 MPa	10%	2572 MPa	80 °C	27 J/m	81 D	Black	Nylon 6/6	LOCTITE AM
3843	Versatile, good all-around engineering polymer	●	53 MPa	43%	1806 MPa	60 °C	53 J/m	74 D	Black, Clear, White	ABS, delrin, polypropylene	LOCTITE AM
Dura56	Durable, impact-resistant, exceptional surface finish, low cost per kg	●	44 MPa	78%	1595 MPa	52 °C	56 J/m	72 D	Black	ABS, delrin, polypropylene	TDS
3172	Moderately flexible, ductile, great impact strength	●	39 MPa	105%	1494 MPa	51 °C	73 J/m	72 D	Cyan, Grey	Impact modified polypropylene, nylon 6, HDPE	LOCTITE AM
IND405	Clear, moderately flexible, ductile, great impact strength	●	52 MPa	127%	1378 MPa	53 °C	72 J/m	79 D	Clear	Impact modified polypropylene, nylon 6, HDPE	LOCTITE AM
ST45	Versatile, good all-around engineering polymer	●	53 MPa	21%	2000 MPa	63 °C	20 J/m	81 D	Black, Clear	ABS, delrin	BASF Forward AM
Somos QuickGen 500	Uniquely flexible engineering material with great impact strength	●	20 MPa	42%	465 MPa	62 °C (Tg)	70 J/m	76 D	Clear	LDPE	
402	TPU-like elastomer with good tear strength and elongation at break	●	5.5 MPa	230%	42 MPa	--	--	75-90 A	Black	70-90 A TPU, flexible foam	LOCTITE AM
P3 Stretch 475	Resilient, low shore hardness elastomer with good tear strength	●	2.4 MPa	122%	2.5 MPa	--	--	49 A, 45 A (0s, 5s)	Black	Low durometer TPU	LOCTITE AM
MED412	Moderately flexible, ductile, great impact strength	●	37 MPa	110%	1305 MPa	39 °C	50 J/m	78 D	Clear	Medical-grade polypropylene	LOCTITE AM
MED413	Versatile engineering medical grade material	●	46 MPa	51%	1673 MPa	68 °C	59 J/m	79 D	Clear, White	Medical-grade ABS	LOCTITE AM
WeatherX 100	Environmentally durable. Dimensionally stable. Good UV, chemical and temperature resistance	●	60 MPa	26 %	60 MPa	67 °C	26 %	26 %	Black	Thermoplastics	

*Bold blue values = Highest value in it's category. Material categories: ●Elastomer ●High temp ●General purpose ●Medical ●Tough

Origin® One Advanced Materials Comparison

Material name	Temperature resistance	Flame	Chemical resistance	UV stability	Dielectric strength	Water absorption	Strength	Stiffness	Toughness	Biocompatibility testing	Print speed	Material cost
3955	Strong	Strong	Refer to data sheet	Good	Strong	-	Strong	Strong	Low	-	Strong	\$\$\$
403	Strong	-	-	Good	Strong	-	Strong	Strong	Low	-	Good	\$\$
3843	Good	-	Refer to data sheet	Good	Strong	Good	Good	Good	Good	Cyto, irritation	Good	\$\$
Dura56	Low	-	-	Good	-	High	Good	Good	Strong	-	Good	\$
3172	Low	-	-	Good	-	Good	Good	Good	Strong	Cyto, irritation	Good	\$\$
IND405	Low	-	-	Good	-	Good	Good	Good	Strong	Cyto, irritation	Good	\$\$
ST45	Good	Good	-	Good	Strong	-	Good	Strong	Low	Cyto, irritation, sensitization	Strong	\$
QG 500	Good	-	-	Good	-	Low	Low	Low	Strong	-	Strong	\$\$
402	-	-	Refer to data sheet	Good	-	High	Low	Low	-	Irritation	Low	\$\$
MED412	Low	-	-	Good	-	Low	Good	Good	Good	Cyto, irritation, sensitization	Good	\$\$\$
MED413	Good	-	-	Good	-	High	Good	Good	Strong	Cyto, irritation, sensitization	Good	\$\$\$
P3 Deflect 120	Strong	TBD	TBD	TBD	TBD	Low	Strong	Strong	Low	TBD	Strong	\$\$
P3 Stretch 475	-	-	TBD	TBD	Strong	High	Low	Low	-	TBD	Strong	\$\$
WeatherX 100	Good	-	Very good	Very good	-	Low	26%	Good	Good	-	Good	\$\$

*- = Data unavailable

Note: This guide should be used to compare Origin certified materials with each other. Please refer to individual material data sheets for more info.

© 2024 Stratasys Ltd. All rights reserved. Stratasys, Stratasys signet, Origin and P3 are trademarks or registered trademarks of Stratasys Ltd. and/or its subsidiaries or affiliates and may be registered in certain jurisdictions. All other trademarks belong to their respective owners. Product specifications subject to change without notice. MDS_P3_Origin_One_0124a